

MIC0204PA

GaAs MMIC, Power Amplifier, 1.5 W, 0.85 – 3.75 GHz


v03.20



Features

- ✓ 1.5 W, Power Amplifier
- ✓ Small Signal Gain: 19 dB
- ✓ Large Signal Gain: 21 dB
- ✓ P_{1dB} Output Power: 32.8 dBm
- ✓ P_{SAT} Output Power: 33 dBm
- ✓ PAE: 56 %
- ✓ Die Size: 1.6x1.4x0.1 mm

Die Device Layout

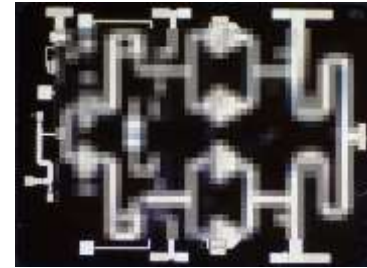

General Description

MIC0204PA is a microwave power amplifier die and it made by the 0.25 μm length of Gallium Arsenide on Silicon (GaAs/Si) pHEMT technology process. The die is grounded by through back metal hole.

Application

- ✓ Commercial Radar System
- ✓ Point-to-Point Radio
- ✓ Satellite communication
- ✓ Military Radar System

Electrical Specification

Test condition unless otherwise notes: 25 °C, U_G = -4 V, U_D = 8 V, I_D = 200 mA, continuous mode.

Parameter	Typ.	Units
Frequency Range (Δf)	0.85÷3.75	GHz
Small Signal Gain (S ₂₁)	19	dB
Large Signal Gain (S ₂₁)	21	dB
Gain Flatness (ΔS_{21})	±0.65	dB
Output Power for 1 dB Compression (P _{1dB})	32.8	dBm
Saturated Output Power (P _{SAT})	33	dBm
Reverse Isolation (S ₁₂)	25.5	dB
Input Voltage Standing Wave Ratio (VSWR in)	1.88	-
Output Voltage Standing Wave Ratio (VSWR out)	1.99	-
Power Added Efficiency (PAE)	56	%
Drain Bias Voltage (V _D)	8	V
Gate Bias Voltage (V _G)	-4	V
Supply Current (I _D)	200	mA

MIC0204PA


GaAs MMIC, Power Amplifier, 1.5 W, 0.85 – 3.75 GHz

v03.20




Power Amplifier Measurements (continuous mode)


Small Signal Gain ($P_{IN} = -20\text{dBm}$)

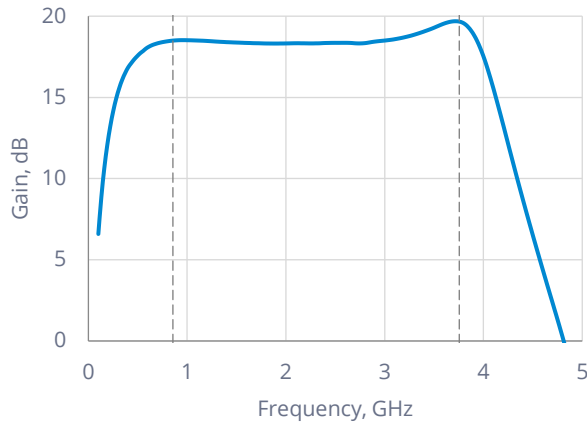


Reverse Isolation

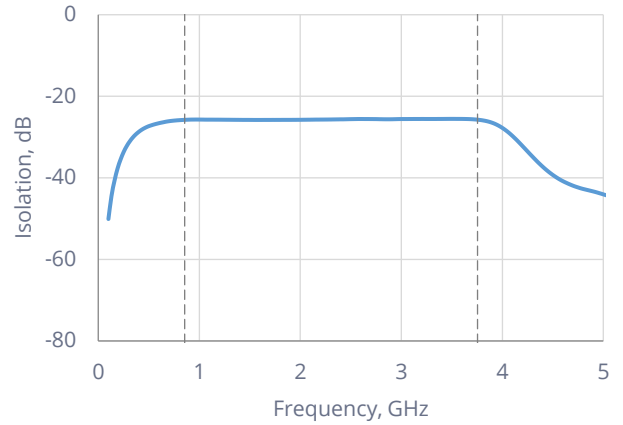


Voltage Standing Wave Ratio

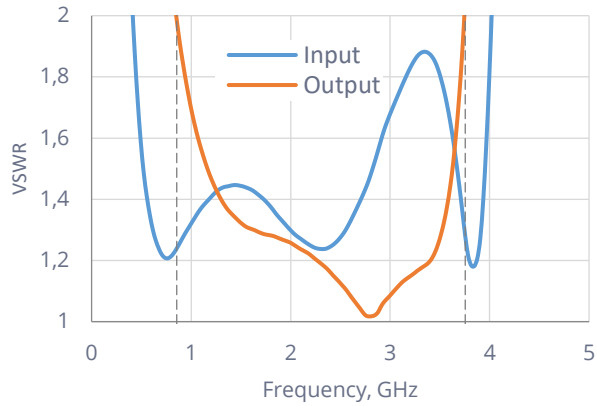


Return Loss

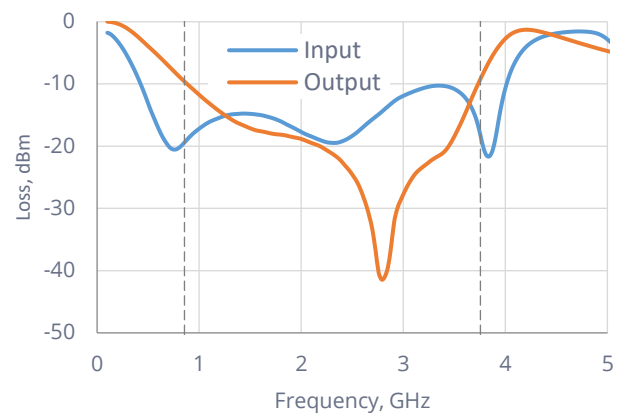

Large Signal Gain ($P_{IN} = 12\text{ dBm}$)

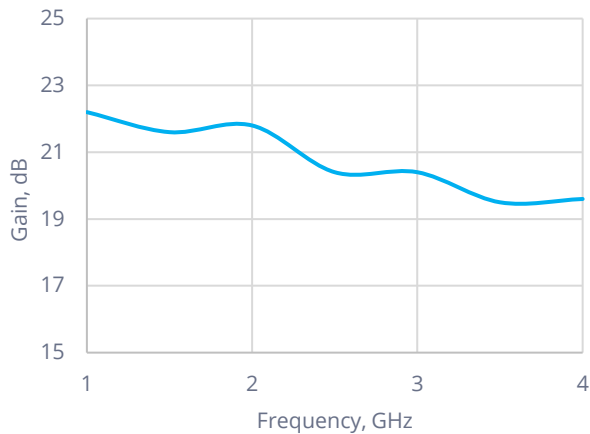

Output Power

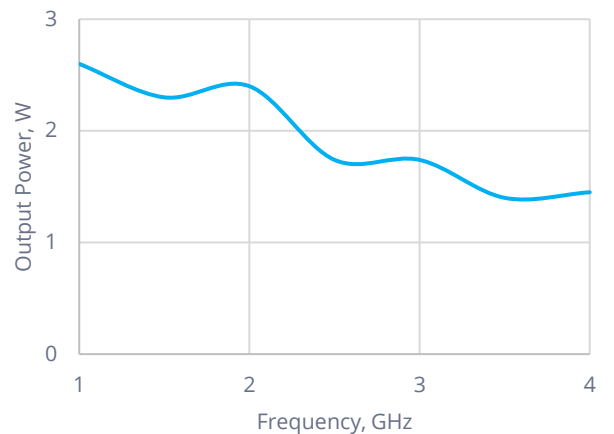


MIC0204PA

GaAs MMIC, Power Amplifier, 1.5 W, 0.85 – 3.75 GHz


v03.20




Output P1dB compression

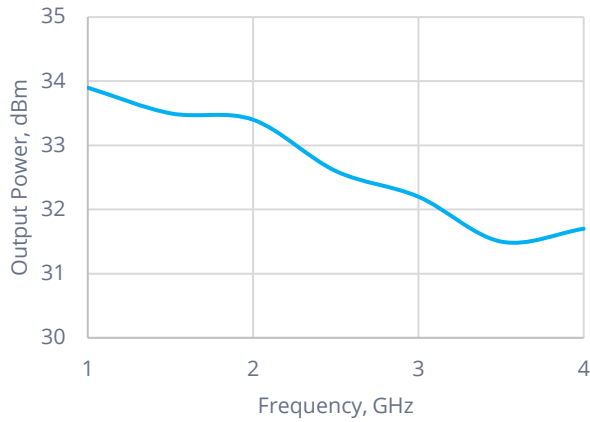


Output Saturation Power

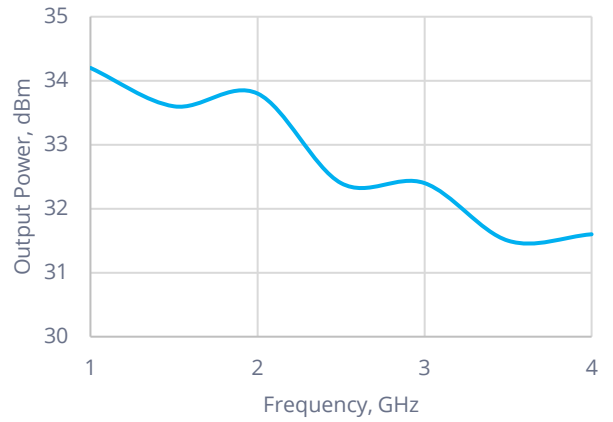


Output Power vs. Input Power

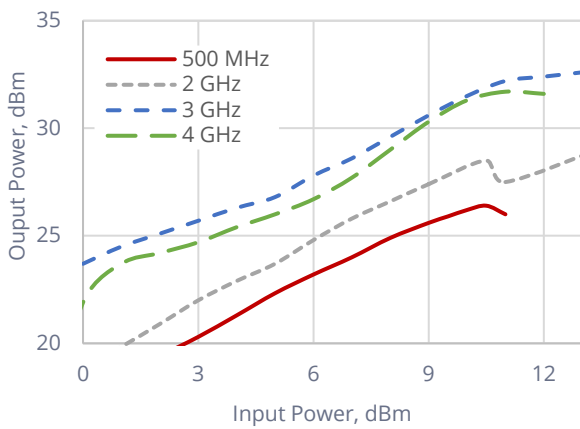

Output Power vs. Input Power

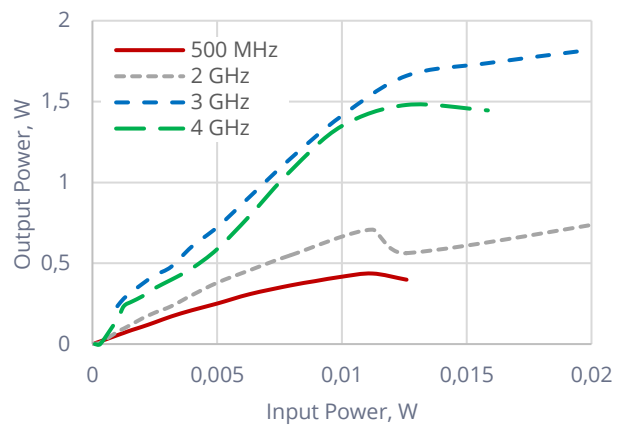

PAE vs. Input Power (F = 2,8 GHz)

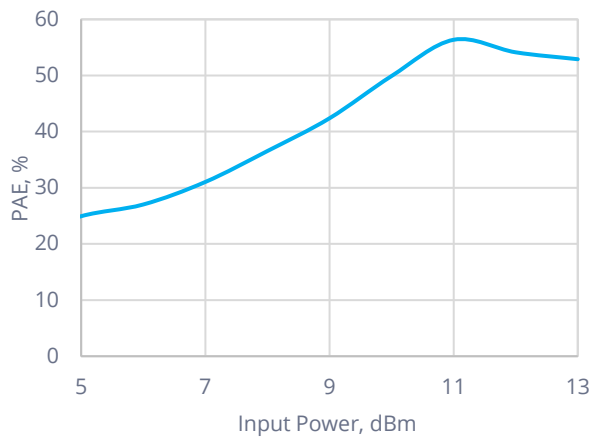

MIC0204PA

GaAs MMIC, Power Amplifier, 1.5 W, 0.85 – 3.75 GHz

v03.20



Absolute Maximum Ratings

Parameter	Absolute Maximum	Unit
Gate Voltage (V_g)	-0.4±0.6	V
Drain Voltage (V_d)	+9	V
Input Power (P_{in})	+27	dBm
Storage Temperature	-75 to +95	°C
Operating Temperature	-60 to +85	°C
Channel Temperature	+175	°C

MIC0204PA



GaAs MMIC, Power Amplifier, 1.5 W, 0.85 – 3.75 GHz

v03.20



Application Circuit

Die Outline

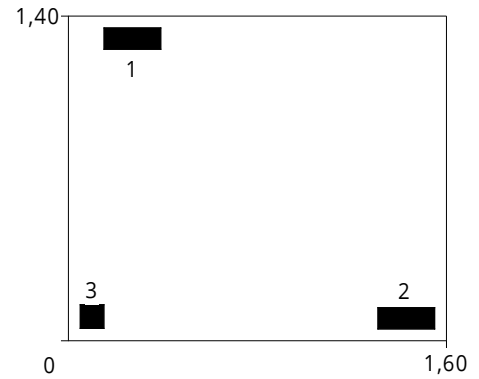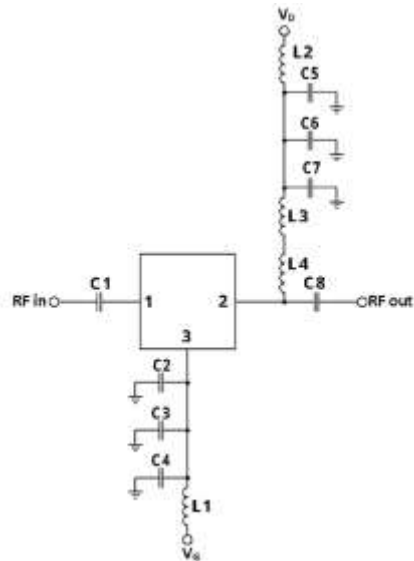

Additional Components

Reference Designator	Components
C1, C8	Caps: 220 pF, GRM1885C1H221J
C2, C7	Caps: 10 pF, ATC600L100FW200T
C3, C6	Caps: 560 pF, GRM1885C1H651J
C4-5	Caps: 100 nF, GRM1885C1H122JA01
L1-4	Ind: 39 nH, LQW18AN39NG00

Pad Diagram & Dimension (units in mm)

N	Function	Origin, mm		Size, mm	
		X	Y	X	Y
1	RF in	0.27	2.09	0.10	0.30
2	RF out / V _D	1.43	0.10	0.10	0.30
3	V _G	0.10	0.10	0.10	0.10

MIC0204PA

GaAs MMIC, Power Amplifier, 1.5 W, 0.85 – 3.75 GHz

v03.20



Handling and Assembly Information

CAUTION! - This MMIC Products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- *Do not ingest.*
- *Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.*
- *Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.*

Life Support Policy - This product is not authorized for use as critical components in life support devices or systems. As used herein: (1) Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. (2) A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



ESD - Gallium Arsenide (GaAs) devices are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic containers, which should be opened in cleanroom conditions at an appropriately grounded antistatic workstation. Devices need careful handling using correctly designed collets, vacuum pickups or, with care, sharp tweezers.

Die Attachment - GaAs Products are 0.100 mm (0.004") thick and have vias through to the backside to enable grounding to the circuit. Microstrip substrates should be brought as close to the die as possible (<100um is good). The mounting surface should be clean and flat. If using conductive epoxy, recommended epoxies are Namics SK70N, Ablestick 84-1LMI or 84-1LMI cured in a nitrogen atmosphere per manufacturer's cure schedule. Apply epoxy sparingly to avoid getting any on to the top surface of the die. An epoxy fillet should be visible around the total die periphery. If eutectic mounting is preferred, then a fluxless gold-tin (AuSn) preform, approximately 0.001 thick, placed between the die and the attachment surface should be used. A die bonder that utilizes a heated collet and provides scrubbing action to ensure total wetting to prevent void formation in a nitrogen atmosphere is recommended.

Wire Bonding - Windows in the surface passivation above the bond pads are provided to allow wire bonding to the die's gold bond pads. The recommended wire bonding procedure uses 0.076 mm x 0.013 mm (0.003" x 0.0005") 99.99% pure gold ribbon with 0.5-2% elongation to minimize RF port bond inductance. Gold 0.025 mm (0.001") diameter wedge or ball bonds are acceptable for DC Bias connections. Aluminum wire should be avoided. Thermo-compression bonding is recommended though thermosonic bonding may be used providing the ultrasonic content of the bond is minimized. Bond force, time and ultrasonics are all critical parameters. Bonds should be made from the bond pads on the die to the package or substrate. All bonds should be as short as possible.